


**Cevni sistemi/
Tehnika spajanja cevi**

F1 Prestabo sa SC-Contur

F1

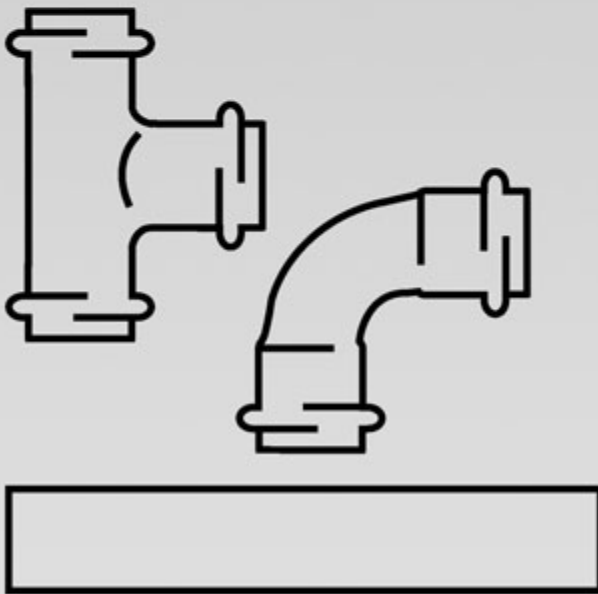

Sistemske cevi i press spojevi od nelegiranog čelika

Stabilnost savijanja i oblikovanja za brzu i čistu instalaciju grejanja i industrijska postrojenja.

U sekundi hladno spojeno sa svim prednostima koje iz toga proizlaze. Kako nema lemljenja ni zavarivanja, izbegnuta je opasnost od požara – to je posebno važno kod sanacija.

Prestabo spojnice imaju **SC-Contur** – to je funkcija na samom press spoju.

SC-Contur je označena sa crvenom bojom. Nepresovani spojevi otkrivaju se vrlo brzo. Vidljivo pojavljivanje vode kod punjenja instalacije u celokupnom području pod pritiskom od 1,0 do 6,5 bara. Kod vazдушnih proba ili inertnih gasova od 110 mbar do 3,0 bara vidljivo se prepoznaje pad pritiska na manometru.

Prestabo press spojnice su napravljene od nelegiranog čelika materijal br. 1.0308 (E235), po DIN EN 10305-3, spolja galvanski pocinkovano za debljinu cinka od 8-15 mikro m.

Prestabo sistem postoji u dve izvedbe cevi:

- Sistemske cevi od nelegiranog čelika, materijal br.1.0308 (E235) po DIN EN 10305-3 spolja galvanski pocinkovano
- Sistemske cevi od nelegiranog čelika, materijal br.1.0308 (E235) po DIN EN 10305 spolja galvanski pocinkovano sa plastičnim plaštom od polipropilena (PP) u beloj boji (RAL 9001).

Veličina cevi i spojnica: 15,18, 22, 28,35,42,54

Elektrohidraulički sistemski press alat kao i od strujne mreži nezavistan Akku sistemski press alat garantuje nerastavljivo čvrste spojeve.

Područje primene

Grejanje

Zatvoreni sistemi hlađenja i grejanja

Kompresorska postrojenja

Industrijska postrojenja

Označavanje sistemskih cevi i spojnica

Zbog mogućih zamena sa Sanpress Inox proizvodima, sve Prestabo spojnice i cevi se označavaju sa crvenim znakom „Nije za pitku vodu“

Oznaka **SC-Contur** takođe se označava sa crvenom bojom.









Maksimalne radne temperature i radni pritisci pojedinih područja primene molimo da pogledate u tehničkoj dokumentaciji.

Za primenu u industriji sa posebno visokim zahtevima molimo konsultovati proizvodnju.







Sadržaj

Cevi	4
Lukovi i kolena	5
T-komadi	7
Prelazni komadi i spojnice	9
Spojnice, slepe matice i prirubnice	12
Alat za skidanje izolacije	14
Sastavni delovi	15

	podaci za naručivanje	PJ	proiz. broj
Cevi			
 <p>Prestabo-cev, od nelegiranog čelika, 6 m u šipkama, <u>Model 1103</u></p>	12 x 1,2	600 m	650 339
	15 x 1,2	600 m	559 441
	18 x 1,2	240 m	559 458
	22 x 1,5	420 m	559 465
	28 x 1,5	240 m	559 472
	35 x 1,5	180 m	559 496
	42 x 1,5	120 m	559 489
	54 x 1,5	60 m	559 502
 <p>Prestabo XL-cev, od nelegiranog čelika, 6 m u šipkama, <u>Model 1103XL</u></p>	64,0 x 2,0	60 m	598 327
	76,1 x 2,0	30 m	598 334
	88,9 x 2,0	30 m	598 341
	108,0 x 2,0	30 m	598 358
 <p>Prestabo-cev, od nelegiranog čelika, sa plastičnim omotom (PP), 6 m u šipkama, <u>Model 1104</u></p>	15 x 1,2	600 m	577 117
	18 x 1,2	240 m	577 124
	22 x 1,5	420 m	577 131
	28 x 1,5	240 m	577 148
	35 x 1,5	180 m	577 551
	42 x 1,5	120 m	577 568
	54 x 1,5	60 m	577 575
 <p>Prestabo-cev, pocinkovana postupkom Sendzimir, za sprinkler instalacije, 6 m u šipkama, <u>Model 1106</u></p>	22 x 1,5	60 m	656 201
	28 x 1,5	60 m	656 218
	35 x 1,5	30 m	656 225
	42 x 1,5	30 m	656 232
	54 x 1,5	30 m	656 249
 <p>Prestabo-cev, pocinkovana postupkom Sendzimir, za sprinkler instalacije, 6 m u šipkama, <u>Model 1106XL</u></p>	64,0 x 2,0	30 m	656 287
	76,1 x 2,0	30 m	656 256
	88,9 x 2,0	30 m	656 263
	108,0 x 2,0	30 m	656 270
 <p>Prestabo-komad za zavarivanje, od nelegiranog čelika, sa utičnim završnim komadom, nepocinkovan, <u>Model 1105</u></p>	12 x 17,2	5	641 856
	15 x 17,2	5	641 863
	18 x 21,3	5	641 870
	22 x 26,9	5	641 887
	28 x 33,7	5	641 894
 <p>Prestabo-obilazi, od nelegiranog čelika, <u>Model 1109.3</u></p>	12	10	605 186
	15	10	601 232
	18	10	601 249
	22	10	601 256

	podaci za naručivanje	PJ	proiz. broj		
 <p>Lukovi i kolena</p> <p>Prestabo-luk 90°, sa SC-Contur, od nelegiranog čelika, Model 1116</p>	12	10	605 162		
	15	10	558 123		
	18	10	558 130		
	22	10	558 147		
	28	5	558 154		
	35	5	558 161		
	42		558 178		
54		558 185			
 <p>Prestabo XL-luk 90°, sa SC-Contur, od nelegiranog čelika, Model 1116XL</p>	64,0		597 573		
	76,1		597 566		
	88,9		597 580		
	108,0		597 597		
 <p>Prestabo-luk 90°, sa SC-Contur, od nelegiranog čelika, Model 1116.1</p>	12	10	605 179		
	15	10	558 192		
	18	10	558 208		
	22	10	558 215		
	28	5	558 222		
	35	5	558 239		
	42		558 246		
54		558 253			
 <p>Prestabo XL-luk 90°, sa SC-Contur, od nelegiranog čelika, Model 1116.1XL</p>	64,0		597 641		
	76,1		597 658		
	88,9		597 665		
	108,0		597 672		
 <p>Prestabo-luk 45°, sa SC-Contur, od nelegiranog čelika, Model 1126</p>	12	10	604 448		
	15	10	558 260		
	18	10	558 277		
	22	10	558 284		
	28	5	558 291		
	35	5	558 307		
	42		558 314		
54		558 321			
 <p>Prestabo XL-luk 45°, sa SC-Contur, od nelegiranog čelika, Model 1126XL</p>	64,0		597 603		
	76,1		597 610		
	88,9		597 627		
	108,0		597 634		

F1

		podaci za naručivanje	PJ	proiz. broj		
	Prestabo-luk 45°, sa SC-Contur, od nelegiranog čelika, <u>Model 1126.1</u>	12	10	605 155		
		15	10	558 338		
		18	10	558 345		
		22	10	558 352		
		28	5	558 369		
		35	5	558 376		
		42		558 383		
54		558 390				
	Prestabo XL-luk 45°, sa SC-Contur, od nelegiranog čelika, <u>Model 1126.1XL</u>	64,0		597 689		
		76,1		597 696		
		88,9		597 702		
		108,0		597 719		
	Prestabo-luk 90°, sa SC-Contur, od nelegiranog čelika, sa spoljašnjim navojem, <u>Model 1114</u>	12 x 3/8	5	605 346		
		12 x 1/2	5	648 640		
		15 x 3/8	5	558 406		
		15 x 1/2	5	558 413		
		18 x 1/2	5	558 420		
		22 x 3/4	5	558 437		
		28 x 1	5	558 444		
		35 x 1 1/4	5	558 451		
		42 x 1 1/2		558 468		
54 x 2		558 475				
	Prestabo-luk 90°, sa SC-Contur, od nelegiranog čelika, sa spoljašnjim navojem, <u>Model 1114.1</u>	12 x 3/8	5	605 360		
		12 x 1/2	5	649 951		
		15 x 3/8	5	559 519		
		15 x 1/2	5	559 526		
		18 x 1/2	5	559 533		
		22 x 3/4	5	559 540		
	Prestabo-luk 90°, sa SC-Contur, od nelegiranog čelika, sa unutrašnjim navojem, <u>Model 1114.5</u>	12 x 3/8	5	605 353		
		12 x 1/2	5	651 398		
		15 x 1/2	5	601 300		
		18 x 1/2	5	601 317		
		22 x 3/4	5	601 324		
		28 x 1	5	601 331		
			Prestabo-luk 90°, sa SC-Contur, od nelegiranog čelika, sa unutrašnjim navojem, <u>Model 1114.2</u>	12 x 1/2	5	651 404
15 x 1/2	5			656 478		
22 x 1/2	5			601 263		
22 x 3/4	5			601 270		
28 x 1/2	5			601 287		
28 x 3/4	5			601 294		
28 x 1	5			642 310		


podaci za
naručivanje

PJ





proiz.
broj


T-komadi

Prestabo-T-komad,
sa SC-Contur,
od nelegiranog čelika,
Model 1118



12	10	605 193
12 x 15 x 12	10	605 216
15	10	558 611
15 x 12 x 15	5	605 209
15 x 18 x 15	5	642 549
15 x 22 x 15	10	558 857
18	10	558 628
18 x 12 x 18	10	648 596
18 x 15 x 18	10	558 680
18 x 22 x 18	10	558 864
22	10	558 635
22 x 12 x 22	10	648 602
22 x 15 x 15	5	642 617
22 x 15 x 22	10	558 697
22 x 18 x 18	5	642 648
22 x 18 x 22	10	558 703
22 x 22 x 15	5	642 655
22 x 28 x 22	10	558 871
28	5	558 642
28 x 15 x 28	5	558 710
28 x 18 x 28	5	558 727
28 x 22 x 22	5	642 693
28 x 22 x 28	5	558 734
35	5	558 659
35 x 15 x 35	5	558 741
35 x 18 x 35	5	558 758
35 x 22 x 35	5	558 765
35 x 28 x 35	5	558 772
42		558 666
42 x 15 x 42		642 556
42 x 22 x 42		558 789
42 x 28 x 42		558 796
42 x 35 x 42		558 802
54		558 673
54 x 15 x 54		642 570
54 x 22 x 54		558 819
54 x 28 x 54		558 826
54 x 35 x 54		558 833
54 x 42 x 54		558 840







		podaci za naručivanje	PJ	proiz. broj		
	Prestabo XL-T-komad, sa SC-Contur, od nelegiranog čelika, <u>Model 1118XL</u>	64,0		597 801		
		64,0 x 28 x 64,0		597 849		
		64,0 x 35 x 64,0		597 856		
		64,0 x 42 x 64,0		597 863		
		64,0 x 54 x 64,0		597 870		
		76,1		597 818		
		76,1 x 28 x 76,1		597 887		
		76,1 x 35 x 76,1		597 894		
		76,1 x 42 x 76,1		597 900		
		76,1 x 54 x 76,1		597 917		
		76,1 x 64,0 x 76,1		597 924		
		88,9		597 825		
		88,9 x 28 x 88,9		597 931		
		88,9 x 35 x 88,9		597 948		
		88,9 x 42 x 88,9		597 955		
		88,9 x 54 x 88,9		597 962		
		88,9 x 64,0 x 88,9		597 979		
		88,9 x 76,1 x 88,9		597 986		
		108,0		597 832		
		108,0 x 28 x 108,0		597 993		
108,0 x 35 x 108,0		598 006				
108,0 x 42 x 108,0		598 013				
108,0 x 54 x 108,0		598 020				
108,0 x 64,0 x 108,0		598 037				
108,0 x 76,1 x 108,0		598 044				
108,0 x 88,9 x 108,0		598 051				
	Prestabo-T-komad, sa SC-Contur, od nelegiranog čelika, sa unutrašnjim navojem, <u>Model 1117.2</u>	12 x 1/2 x 12	5	605 230		
		15 x 1/2 x 15	5	558 888		
		18 x 1/2 x 18	5	558 895		
		22 x 1/2 x 22	5	558 901		
		22 x 3/4 x 22	5	641 962		
		28 x 1/2 x 28	5	558 918		
		28 x 3/4 x 28	5	558 925		
		35 x 1/2 x 35	5	558 932		
		35 x 3/4 x 35	5	558 949		
		42 x 1/2 x 42		558 956		
		42 x 3/4 x 42		558 963		
		54 x 1/2 x 54		558 970		
		54 x 3/4 x 54		558 987		
	Prestabo XL-T-komad, sa SC-Contur, od nelegiranog čelika, sa unutrašnjim navojem, <u>Model 1117.2XL</u>	64,0 x 3/4 x 64,0		598 068		
		76,1 x 3/4 x 76,1		598 075		
		88,9 x 3/4 x 88,9		598 082		
		108,0 x 3/4 x 108,0		598 099		
	Prestabo-krst komad, sa SC-Contur, od nelegiranog čelika, <u>Model 1148</u>	18 x 15	2	601 157		
		22 x 15	2	601 164		
		28 x 15	2	601 171		







	podaci za naručivanje	PJ	proiz. broj		
 <p>Prelazni komadi i spojnice</p> <p>Prestabo-prelazni komad, sa SC-Contur, od nelegiranog čelika, višestrani, sa spoljašnjim navojem, <u>Model 1111</u></p>	12 x 3/8	5	605 247		
	12 x 1/2	5	648 626		
	15 x 3/8	5	558 994		
	15 x 1/2	5	559 007		
	15 x 3/4	5	641 979		
	18 x 1/2	5	559 014		
	18 x 3/4	5	559 021		
	22 x 1/2	5	641 986		
	22 x 3/4	5	559 038		
	28 x 3/4	5	641 993		
	28 x 1	5	559 045		
	28 x 1 1/4	5	642 006		
	35 x 1 1/4	5	559 052		
	35 x 1 1/2	5	642 013		
	42 x 1 1/2		559 069		
54 x 2		588 663			
 <p>Prestabo XL-prelazni komad, sa SC-Contur, od nelegiranog čelika, višestrani, sa spoljašnjim navojem, <u>Model 1111XL</u></p>	64,0 x 2		629 953		
	64,0 x 2 1/2		629 960		
	76,1 x 2 1/2		629 977		
	88,9 x 3		629 984		
	108,0 x 4		629 991		
 <p>Prestabo-prelazni komad, sa SC-Contur, od nelegiranog čelika, višestrani, sa unutrašnjim navojem, <u>Model 1112</u></p>	12 x 3/8	5	648 633		
	12 x 1/2	5	605 254		
	15 x 3/8	5	642 136		
	15 x 1/2	5	559 557		
	15 x 3/4	5	642 143		
	18 x 1/2	5	559 090		
	18 x 3/4	5	559 106		
	22 x 1/2	5	642 150		
	22 x 3/4	5	559 113		
	22 x 1	5	642 167		
	28 x 3/4	5	642 181		
	28 x 1	5	559 120		
	35 x 3/4	5	642 198		
	35 x 1 1/4	5	642 204		
	42 x 1 1/2		642 211		
54 x 2		642 228			
 <p>Prestabo XL-prelazni komad, sa SC-Contur, od nelegiranog čelika, višestrani, sa unutrašnjim navojem, <u>Model 1112XL</u></p>	64,0 x 2		630 003		
	64,0 x 2 1/2		630 010		
	76,1 x 2 1/2		630 034		
	88,9 x 3		630 041		
	108,0 x 4		630 027		
 <p>Prestabo-utični komad, od nelegiranog čelika, višestrani, sa spoljašnjim navojem, <u>Model 1111.1</u></p>	12 x 3/8	5	605 261		
	12 x 1/2	5	605 278		
	15 x 1/2	5	642 044		
	18 x 1/2	5	642 051		
	22 x 3/4	5	642 082		
	28 x 1	5	642 099		

		podaci za naručivanje	PJ	proiz. broj		
	Prestabo-utični komad, od nelegiranog čelika, višestrani, sa unutrašnjim navojem, Model 1112.1	15 x 1/2	5	559 137		
		18 x 1/2	5	559 144		
		18 x 3/4	5	559 151		
		22 x 1/2	5	559 168		
		22 x 3/4	5	559 175		
	Prestabo-spojnica, sa SC-Contur, od nelegiranog čelika, Model 1115	12	10	604 424		
		15	10	557 980		
		18	10	557 997		
		22	10	558 000		
		28	5	558 017		
		35	5	558 024		
		42		558 031		
		54		558 048		
	Prestabo XL-spojnice, sa SC-Contur, od nelegiranog čelika, Model 1115XL	64,0		597 726		
		76,1		597 733		
		88,9		597 740		
		108,0		597 757		
	Prestabo-klizna spojnica, sa SC-Contur, od nelegiranog čelika, Model 1115.5	12	5	604 431		
		15	5	558 055		
		18	5	558 062		
		22	5	558 079		
		28	5	558 086		
		35	5	558 093		
		42		558 109		
		54		558 116		
	Prestabo XL-klizna spojnica, sa SC-Contur, od nelegiranog čelika, Model 1115.5XL	64,0		597 764		
		76,1		597 771		
		88,9		597 788		
		108,0		597 795		
	Prestabo-redukcija, sa SC-Contur, od nelegiranog čelika, Model 1115.1	15 x 12	10	605 315		
		18 x 12	10	605 322		
		18 x 15	10	558 499		
		22 x 12	10	605 339		
		22 x 15	10	558 505		
		22 x 18	10	558 512		
		28 x 15	5	558 529		
		28 x 18	10	558 536		
		28 x 22	10	558 543		
		35 x 15	5	642 730		
		35 x 22	5	558 550		
		35 x 28		558 567		
		42 x 22		642 761		
		42 x 28		642 778		
		42 x 35		558 574		
		54 x 22		558 581		
		54 x 28		558 598		
54 x 35		642 792				
54 x 42		558 604				

	podaci za naručivanje	PJ	proiz. broj	
 <p>Prestabo XL-redukcija, sa SC-Contur, od nelegiranog čelika, Model 1115.1XL</p>	64,0 x 54		598 105	
	76,1 x 54		598 129	
	76,1 x 64,0		598 112	
	88,9 x 54		598 136	
	88,9 x 64,0		598 143	
	88,9 x 76,1		598 150	
	108,0 x 54		598 167	
	108,0 x 64,0		598 174	
	108,0 x 76,1		598 181	
108,0 x 88,9		598 198		
 <p>Sanpress-prelazni komad, sa SC-Contur, od bronzе, sa čelične cevi na Viega Press sisteme, Model 2215.6</p>	1 x 28	5	588 564	
	1 1/4 x 35		588 328	





F1

	podaci za naručivanje	PJ	proiz. broj		
 <p>Spojnice, slepe matice i pribornice</p> <p>Prestabo-spojnica, sa SC-Contur, od nelegiranog čelika, ravno zaptivanje, <u>Model 1160</u></p>	12	5	642 358		
	15	5	559 304		
	18	5	559 311		
	22	5	559 328		
	28	5	559 335		
	35	5	559 342		
	42		559 359		
54		559 366			
 <p>Prestabo-spojnica, sa SC-Contur, od nelegiranog čelika, ravno zaptivanje, sa spoljašnjim navojem, <u>Model 1165</u></p>	15 x 1/2	5	559 243		
	22 x 3/4	5	559 250		
	22 x 1	5	642 341		
	28 x 1	5	559 267		
	35 x 1 1/4	5	559 274		
	42 x 1 1/2		559 281		
	54 x 2		559 298		
 <p>Prestabo-spojnica, sa SC-Contur, od nelegiranog čelika, sa ravnim zaptivanjem, sa unutrašnjim navojem, <u>Model 1162</u></p>	15 x 1/2	5	641 849		
	18 x 1/2	5	643 454		
	22 x 3/4	5	643 461		
	22 x 1	5	643 478		
	28 x 1	5	643 485		
	35 x 1 1/4		643 492		
	42 x 1 1/2		643 508		
54 x 2		643 515			
 <p>Prestabo-spojnica, sa SC-Contur, od nelegiranog čelika, ravno zaptivanje, <u>Model 1163</u></p>	15 x 3/4	5	559 182		
	15 x 1	5	601 058		
	18 x 1	5	601 065		
	22 x 1	5	559 199		
	22 x 1 1/4	5	601 072		
	22 x 1 1/2	5	601 089		
	28 x 1 1/4	5	559 205		
	28 x 1 1/2	5	601 102		
	35 x 1 1/2	5	559 212		
	35 x 2	5	601 119		
	42 x 1 3/4		559 229		
	42 x 2		601 126		
	54 x 2 3/8		559 236		
	54 x 2 1/2		601 133		
 <p>Prestabo-završna kapa, sa SC-Contur, od nelegiranog čelika, <u>Model 1156</u></p>	12	5	643 577		
	15	5	643 584		
	18	5	643 591		
	22	5	643 607		
	28	5	643 614		
	35		643 621		
	42		643 638		
	54		643 645		
 <p>Prestabo XL-završna kapa, sa SC-Contur, od nelegiranog čelika, sa 3/4\" unutrašnji navoj, <u>Model 1156XL</u></p>	64,0 x 3/4		598 242		
	76,1 x 3/4		598 259		
	88,9 x 3/4		598 266		
	108,0 x 3/4		598 273		

	podaci za naručivanje	PJ	proiz. broj		
	Prestabo-završna kapica, od nelegiranog čelika, Model 1157.1	12	10	605 308	
		15	10	559 373	
		18	10	559 380	
		22	5	559 397	
		28	5	559 403	
		35	5	559 410	
		42		559 427	
		54		559 434	
	Prestabo XL-završna kapa, od nelegiranog čelika, Model 1157.1XL	64,0		598 280	
		76,1		598 297	
		88,9		598 303	
		108,0		598 310	
	Prestabo-prirubnica, sa SC-Contur, od nelegiranog čelika, sa press priključkom, sa čvrstom prirubnicom PN 6, Model 1159.1	35 (DN 32)		642 389	
		42 (DN 40)		642 396	
		54 (DN 50)		642 402	
	Prestabo XL-prirubnica, sa SC-Contur, od nelegiranog čelika, sa press priključkom, sa čvrstom prirubnicom PN 6, Model 1159.1XL	press priključak (prirubnica-veličina)			
		64,0 (DN 50)		630 058	
		64,0 (DN 65)		629 939	
		76,1 (DN 65)		629 946	
		88,9 (DN 80)		629 915	
108,0 (DN 100)		629 922			
	Prestabo-prirubnica, sa SC-Contur, od nelegiranog čelika, sa press priključkom, sa čvrstom prirubnicom PN 10/16, Model 1159	press priključak (prirubnica-veličina)			
		35 (DN 32)		643 546	
		42 (DN 40)		643 553	
54 (DN 50)		643 560			
	Prestabo XL-prirubnica, sa SC-Contur, od nelegiranog čelika, sa press priključkom, sa čvrstom prirubnicom PN 10/16, Model 1159XL	press priključak (prirubnica-veličina)			
		64,0 (DN 65)		598 204	
		76,1 (DN 65)		598 211	
		88,9 (DN 80)		598 228	
		108,0 (DN 100)		598 235	

F1

	podaci za naručivanje	PJ	proiz. broj		
 <p>Pribor za prirubnički spoj, za spajanje prirubnice, sastoji se od: vijka, podloški i matica iz čelika pocinkovano, <u>Model 2259.7</u></p>	prirubnica veličina (nazivni pritisak PN) veličina vijaka DN 25 (16) M12x65 DN 32–50 (16) M16x70 DN 32–65 (6) M12x50		494 056 494 063 651 251		
 <p>Set pribora, za spajanje prirubnica, sastoji se od: 8 vijaka, 16 podloški i 8 matica, sve od čelika, pocinkovano, <u>Model 2259.7XL</u></p>	prirubnica veličina (nazivni pritisak PN) veličina vijaka DN 65–100 (16) M16x70 DN 80–100 (6) M16x60		494 087 651 268		
 <p>Alat za skidanje izolacije Prestabo-skidač zaštite, za pravilno skidanje zaštite kod Prestabo-cevi sa plastičnom (PP) zaštitom, <u>Model 1158</u></p>	15 + 22 18 + 28 35 + 42 54		586 553 586 560 586 577 588 526		
 <p>Sekači za zamenu, za skidač zaštite, 2 kom., <u>Model 1158.1</u></p>	15–28 35–54		630 201 630 218		

	podaci za naručivanje	PJ	proiz. broj			
 <p>Sastavni delovi</p> <p>Zaptivni element, od EPDM, za Sanpress-, Sanpress Inox-, Profipress- i Copatin® - fittinge, za pitku vodu i grejanje, termički postojana do 110°C, <u>Model 2289</u></p>	12 x 2,35	10	288 600			
	15 x 2,5	10	183 400			
	18 x 2,5	10	281 595			
	22 x 3	10	183 523			
	28 x 3	10	184 452			
	35 x 3	10	181 208			
	42 x 4	10	184 940			
54 x 4	10	191 153				
 <p>Zaptivač, od EPDM, za Sanpress Inox XL- fittinge, za pitku vodu i grejanje, otpornost na temperaturu do 110°C, <u>Model 2389XL</u></p>	64,0 x 5		594 312			
	76,1 x 5		583 705			
	88,9 x 5		583 712			
	108,0 x 5		583 699			
 <p>Zaptivač, od FKM, za Sanpress-, Sanpress Inox-, Profipress- i Prestabo-fittinge, za područja primene kod visokih temperatura, kao što su npr.: - vrelo vodi toplana do 140°C i 16 bar - niskotemperaturna para ≤120°C i 1 bar - solarna postrojenja/vakumske cevi, <u>Model 2286</u></p> <p>Uputstvo: Za upotrebu u drugim područjima obavezno kontaktirati fabriku u Attendornu!</p>	12 x 2,35	5	459 376			
	15 x 2,5	5	459 390			
	18 x 2,5	5	459 406			
	22 x 3	5	459 413			
	28 x 3	5	459 420			
	35 x 3	5	459 437			
	42 x 4	5	459 444			
	54 x 4		459 451			
	 <p>Zaptivač, od FKM, za Sanpress Inox-, Profipress- i Prestabo-fittinge, za područja primene kod visokih temperatura, kao npr.: - vrelo vodi toplana do 140°C i 16 bar - niskotemperaturna para ≤120°C i 1 bar - solarna postrojenja/vakumske cevi, <u>Model 2386XL</u></p>	64,0 x 5		614 461		
		76,1 x 5		614 485		
88,9 x 5			614 478			
108,0 x 5			614 492			

		podaci za naručivanje	PJ	proiz. broj		
	Zaptivač, od AFM 34 bez azbesta, <u>Model 2259.9</u>	DN 32/PN 6	5	650 131		
		DN 40/PN 6	5	650 148		
		DN 50/PN 6	5	650 551		
		DN 20/PN 16	10	611 309		
		DN 25/PN 16	10	409 128		
		DN 32/PN 16	10	409 135		
		DN 40/PN 16	10	409 142		
DN 50/PN 16	10	409 258				
	Zaptivač, od AFM 34 bez azbesta, <u>Model 2259.9XL</u>	DN 65/PN 6	5	650 575		
		DN 80/PN 6	5	650 582		
		DN 100/PN 6	5	650 599		
		DN 65/PN 16	10	356 293		
		DN 80/PN 16	10	356 309		
DN 100/PN 16	10	356 316				
	Zaštitna kapa, od plastike, za zatvaranje krajeva cevi, <u>Model 2259.1</u> Upozorenje: Nije za probe pod pritiskom	15		611 149		
		18		612 054		
		22		612 061		
		28		612 078		
		35		612 085		
		42		612 092		
54		612 108				
	Zaštitna kapa, od plastike, za zatvaranje krajeva cevi, <u>Model 2259.1XL</u> Upozorenje: Nije za probe na pritisak	64,0		612 115		
		76,1		612 122		
		88,9		612 139		
		108,0		612 146		
	Marker, za Viega press-sisteme, <u>Model 2490.1</u>			606 121		